




ASEC Slim Line Mortice Magnet

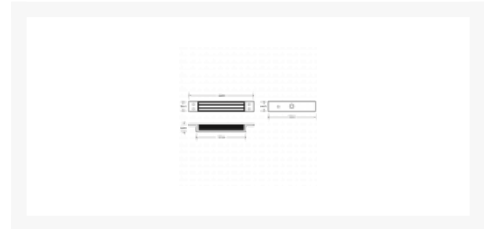

Description

12VDC / 24VDC slim line mortice magnet monitored. Designed for sliding or single swing door applications.




Electronically Monitored

Features

- Continuously rated
- Satin anodised aluminium finish
- Monitored version - C/NO/NC contacts
- Suitable for single swinging or sliding door applications (not to be used as shear lock)
- For use with transom housing

Product Table

 The image shows two components of the AS8533 10000R product. The top component is a dark blue, rectangular metal bracket with a central slot and mounting tabs on both ends. The bottom component is a silver-colored metal plate with a central circular hole and mounting tabs on both ends.	AS8533
	10000R