




ASEC Standard Double Magnet

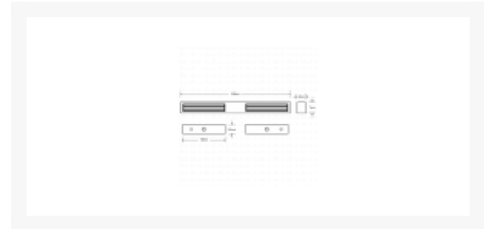

Description

12VDC / 24VDC double magnet available monitored or unmonitored. Designed for double door applications.





Electronically Monitored

Features

- Continuously rated
- Satin anodised aluminium finish
- Monitored version - C/NO/NC contacts
- Hall monitoring
- AS8537 is Monitored
- AS8536 is Unmonitored

Product Table

	<p>AS8537</p> <p>Monitored</p>
	<p>AS8536</p> <p>Unmonitored</p>