




ASEC Monitored Mortice Release

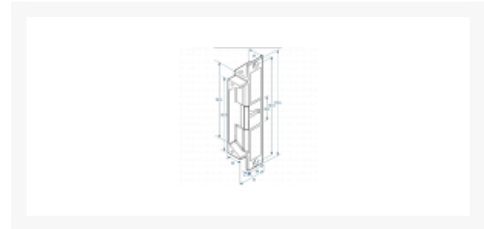

Description

This Asec Mortice Release is dual monitored with both lock monitoring and door status monitoring contacts. Designed for use on doors up to 680Kg it is suitable for use on both timber and metal doors and, due to its shallow depth, it is ideal for narrow applications. This is a versatile and reliable choice of release which is available as either fail locked or fail unlocked, with reversible handing and to suit doors with cylindrical locks.



Electronically Monitored



Reversible Handing

Features

- High security electric release
- Dual monitored lock & cam
- Fail-safe/fail-secure selectable
- 12-24V AC/DC
- Suitable for use with metal or timber door frames
- Shallow depth for narrow applications

Product Table



AS11824

12/24V AC/DC